UBK10BH DIAIO

DIAION™ UBK10BH is a cation exchange resin with a uniform particle size. It has 10% cross-linkages and excellent properties. A wide range of applications, especially in a field of condensate polishing for power plants, is recommended.

_			
η.	~~	ᅬ	 ~+
\mathbf{P}	"	(1	 ct

Product					
Grade Name		DIAION TM UBK10BH			
Туре		Strong Acid Cation			
Matrix		Styrene-DVB, Gel			
Functional Group		Sulfonic acid			
Ionic Form		H ⁺			
Specification					
Whole Bead Count	-	95 min.			
Salt Splitting Capacity	meq/mL	2.0 min.			
Water Content	%	40 - 50			
Particle Size Distribution 500 - 850 μm	%	95 min.			
Particle Size Distribution thr. 500 μm	%	1 max.			
Mean Particle Size	μm	650 ± 50			
Uniformity Coefficient	-	1.10 max.			
Ionic Form Conversion H Form	eq%	99 min.			
Ionic Form Conversion Na Form	eq%	0.1 max.			
Typical Properties					
Shipping Density	g/L	800			
Particle Density	g/mL	1.22			
Total Swelling (Na ⁺ to H ⁺)	%	8			
Recommended Operating Conditions					
Maximum Operating Temperature	°C	120			
Operating pH Range		0 - 14			
Minimum Bed Depth	mm	450			
Service Flow Rate	m/h	Fast Rinse 5 - 60			
		Condensate Polishing 40 - 150			
Regenerant		HCI			
		H_2SO_4			
Regenerant Concentration	%	HCl 4 - 8			
		H ₂ SO ₄ 1 - 10			
Regenerant Level	g/L	30 - 150			
Regenerant Flow Rate	m/h	1 - 10			



Total Rinse Requirement



BV



3 - 6

DIAION™ UBK10BH

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAIONTM UBK10BH resin in normal down flow operation is shown in the graphs below.

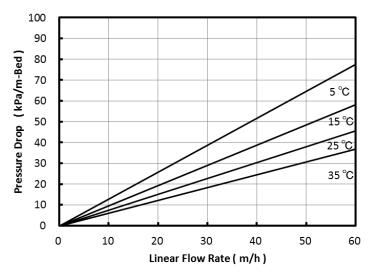


Fig. 1 Pressure Drop of UBK10BH

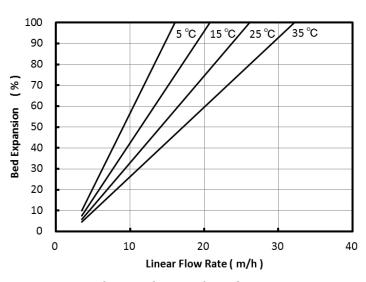


Fig. 2 Bed Expansion of UBK10BH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.





