

Product Data Sheet

DIAION™ UBK535K

DIAION™ UBK535K is a high quality uniform particle size cation exchange resin. It has standard crosslinkage and excellent properties for industrial applications. It is recommended for industrial pharmaceuticals, fermentation and food fields.

Product

Grade Name	DIAION™ UBK535K	
Type	Strong Acid Cation	
Matrix	Styrene-DVB, Gel	
Functional Group	Sulfonic acid	
Ionic Form	Ca ²⁺	

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.7 min.
Water Content	%	47 - 51
Particle Size Distribution 320 - 380 µm	%	90 min.
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion (Ca ²⁺)	eq%	98 min.

Typical Properties

Shipping Density	g/L	840
Particle Density	g/mL	1.27
Mean Particle Size	µm	350

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14

**Biokal**

© +31529485928


info@biokal.com
<https://www.biokal.com>
**MITSUBISHI
CHEMICAL**

Chromatography & Purification Solutions

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK535K resin in normal down flow operation is shown in the graphs below.

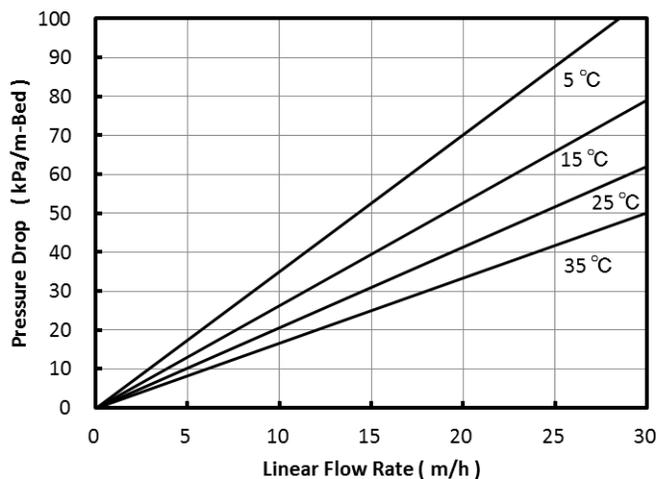


Fig. 1 Pressure Drop of UBK535K

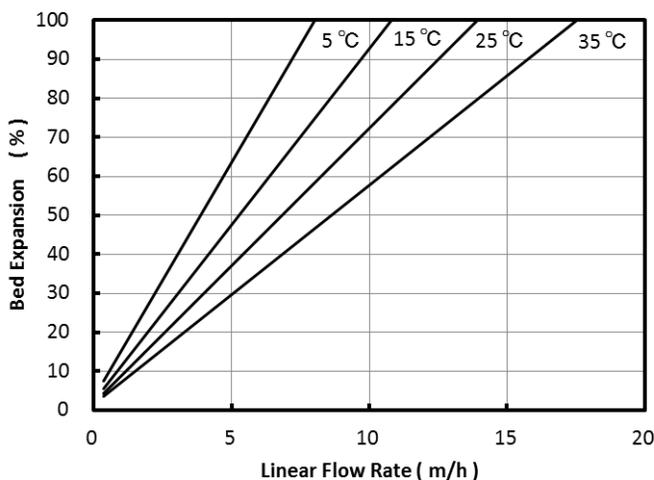


Fig. 2 Bed Expansion of UBK535K

Notice

DIAION™ is a registered trademark of Mitsubishi Chemical Corporation. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical Corporation specifications agreed to pursuant to a signed writing during the warranty period, and except as required by law, MITSUBISHI CHEMICAL CORPORATION AND ITS AFFILIATES MAKE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.